

## SL-900 SERIES

### SPECIFICATIONS

- ◆ **Multi point discrete level switch**
- ◆ **Ideal solution for the detection and measurement of ultra-pure chemical fluids**
- ◆ **Provides single/ multiple discrete point levels with a very high degree of precision**

The Model SL-900 Series Ultrasonic Micromasurement System is an ideal solution for the detection and measurement of ultra-pure chemical fluids in the semiconductor industries. Measuring a fluid level accurately and reliably in the chemical vapor deposition process is of the utmost importance to the semiconductor wafer fabrication process. The Measurement Specialties SL-900 Series provides single or multiple discrete point levels with a very high degree of precision. The SL-900 Series ultrasonic system is well suited for high viscosity liquids such as DMAH, titanium precursors and copper precursors.

### FEATURES

- ◆ 316 L stainless steel machined sensor body
- ◆ Sensor material has an electropolished finish ( $R_a = 25 \mu\text{in}$  – minimum)
- ◆ Miniature sensor size reduces liquid volume displacement
- ◆ Works with the following chemicals independent of dielectric, viscosity, color, density and opacity of chemical fluids: DMAH, TAETO, CVD, TDEAT, CUTMUS, TEOS, DCE, TCA
- ◆ High pressure vessel application up to 250 PSIG (1724 kPa) (consult factory for higher pressure applications)
- ◆ Accuracy of each discrete point level is  $\pm 2$  mm
- ◆ Repeatability of  $\pm 1$  mm is typical
- ◆ Single point low level as close as 1/4" (6 mm) from bottom of vessel for 5/8" tube and 5/16" for 1/2" tube

### APPLICATIONS

- ◆ Semiconductor industries
- ◆ Pharmaceutical industries
- ◆ High pressure vessels



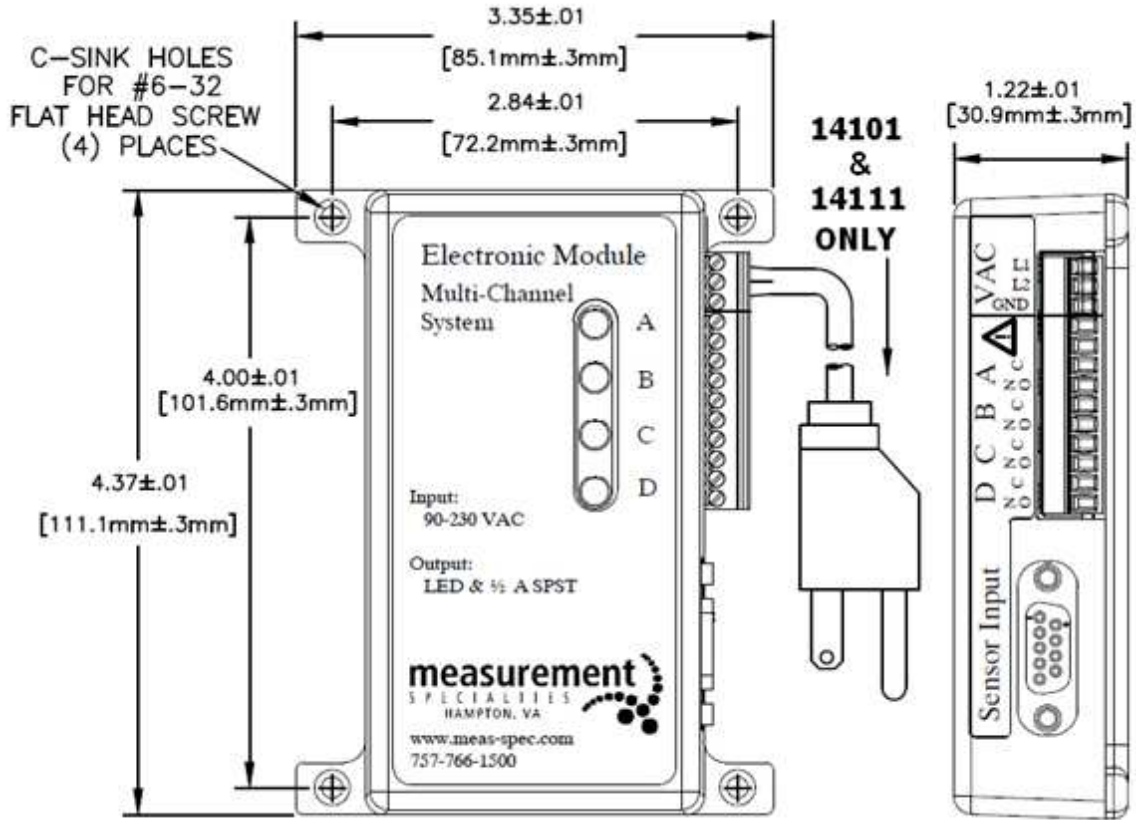


Figure 2: 4 Point Electronics (Note – 115 VAC version shown)

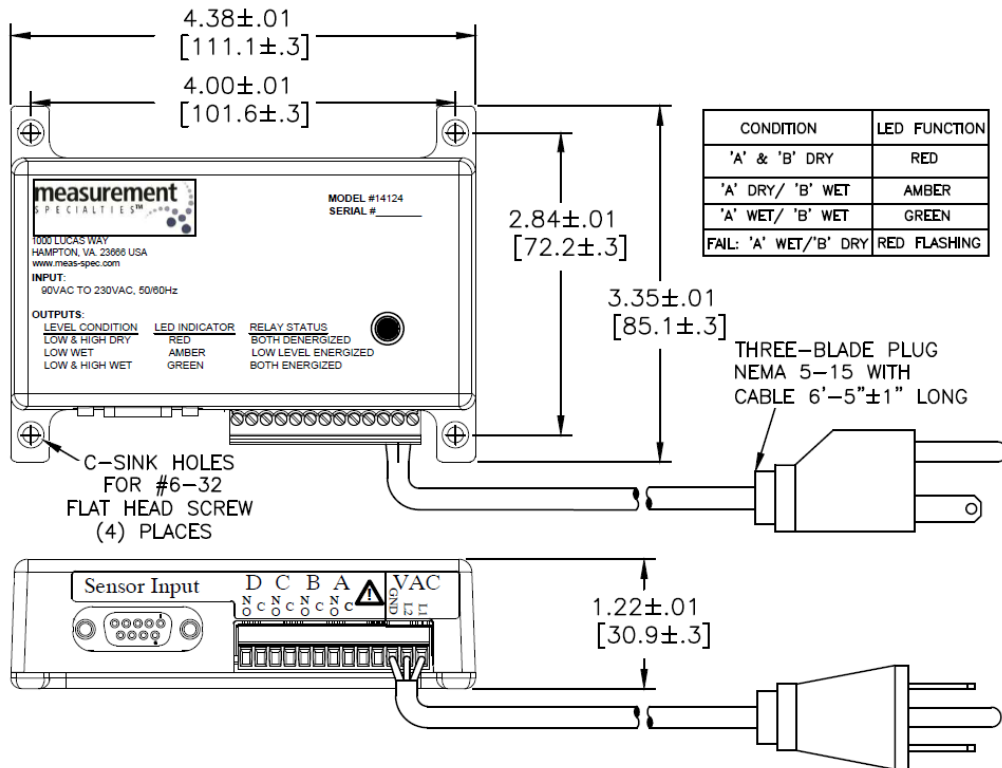
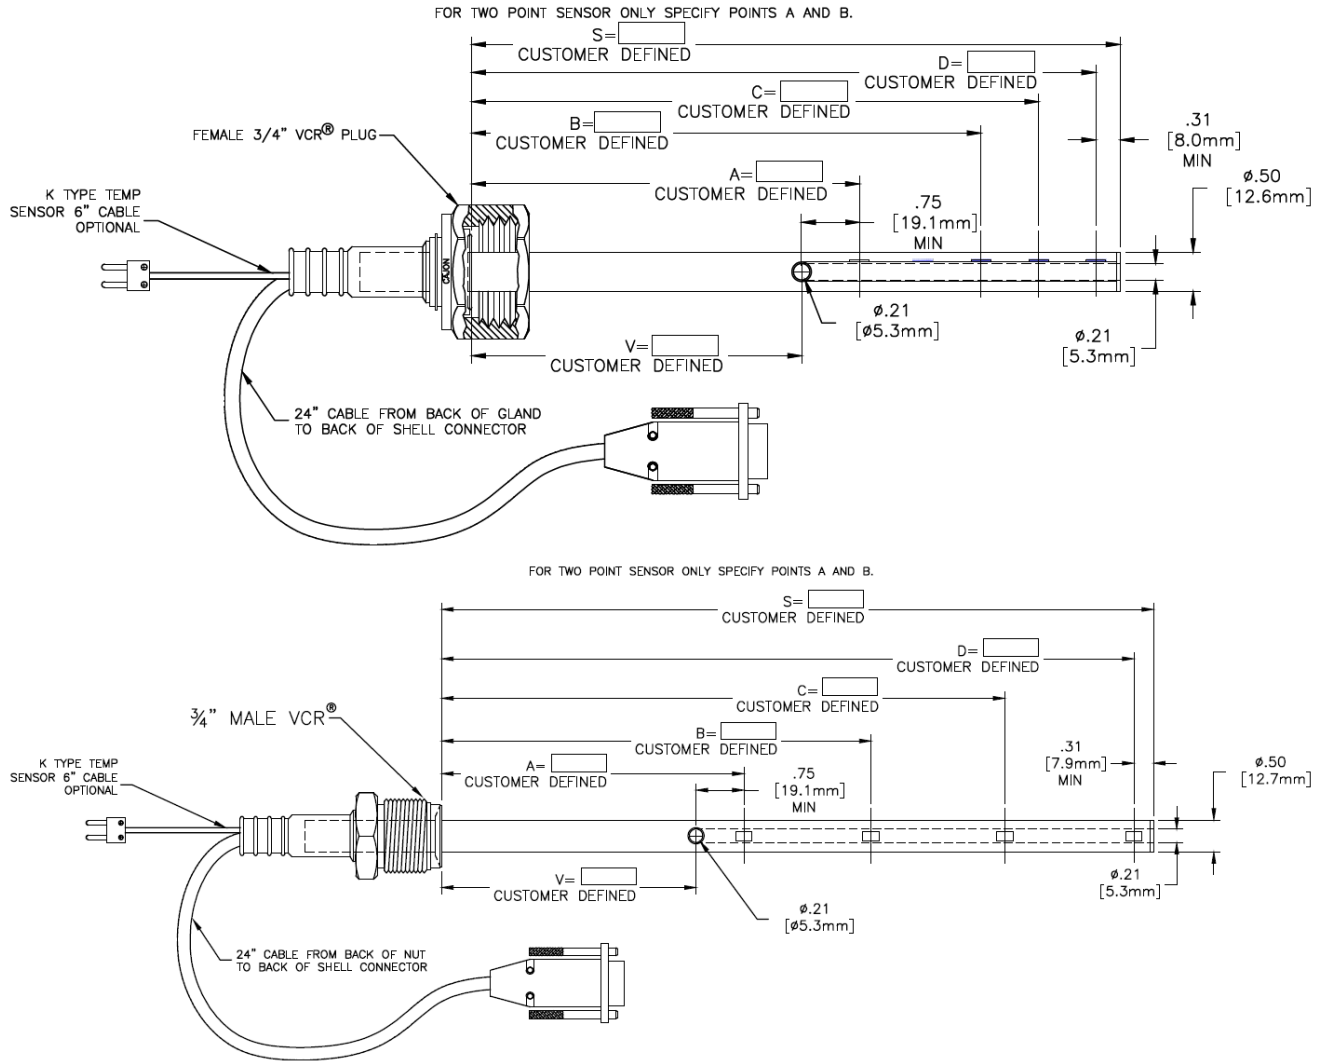


Figure 3: 2 Point Electronics (Note – only available in 115 VAC version)



**Figure 4: SL-900 series with 1/2" OD tube. The top drawing shows a sensor with a 3/4" female VCR® fitting while the bottom drawing shows it with a 3/4" male VCR® fitting. Alternatively, 1/2" VCR® fittings are also available with the 1/2" tubes.**

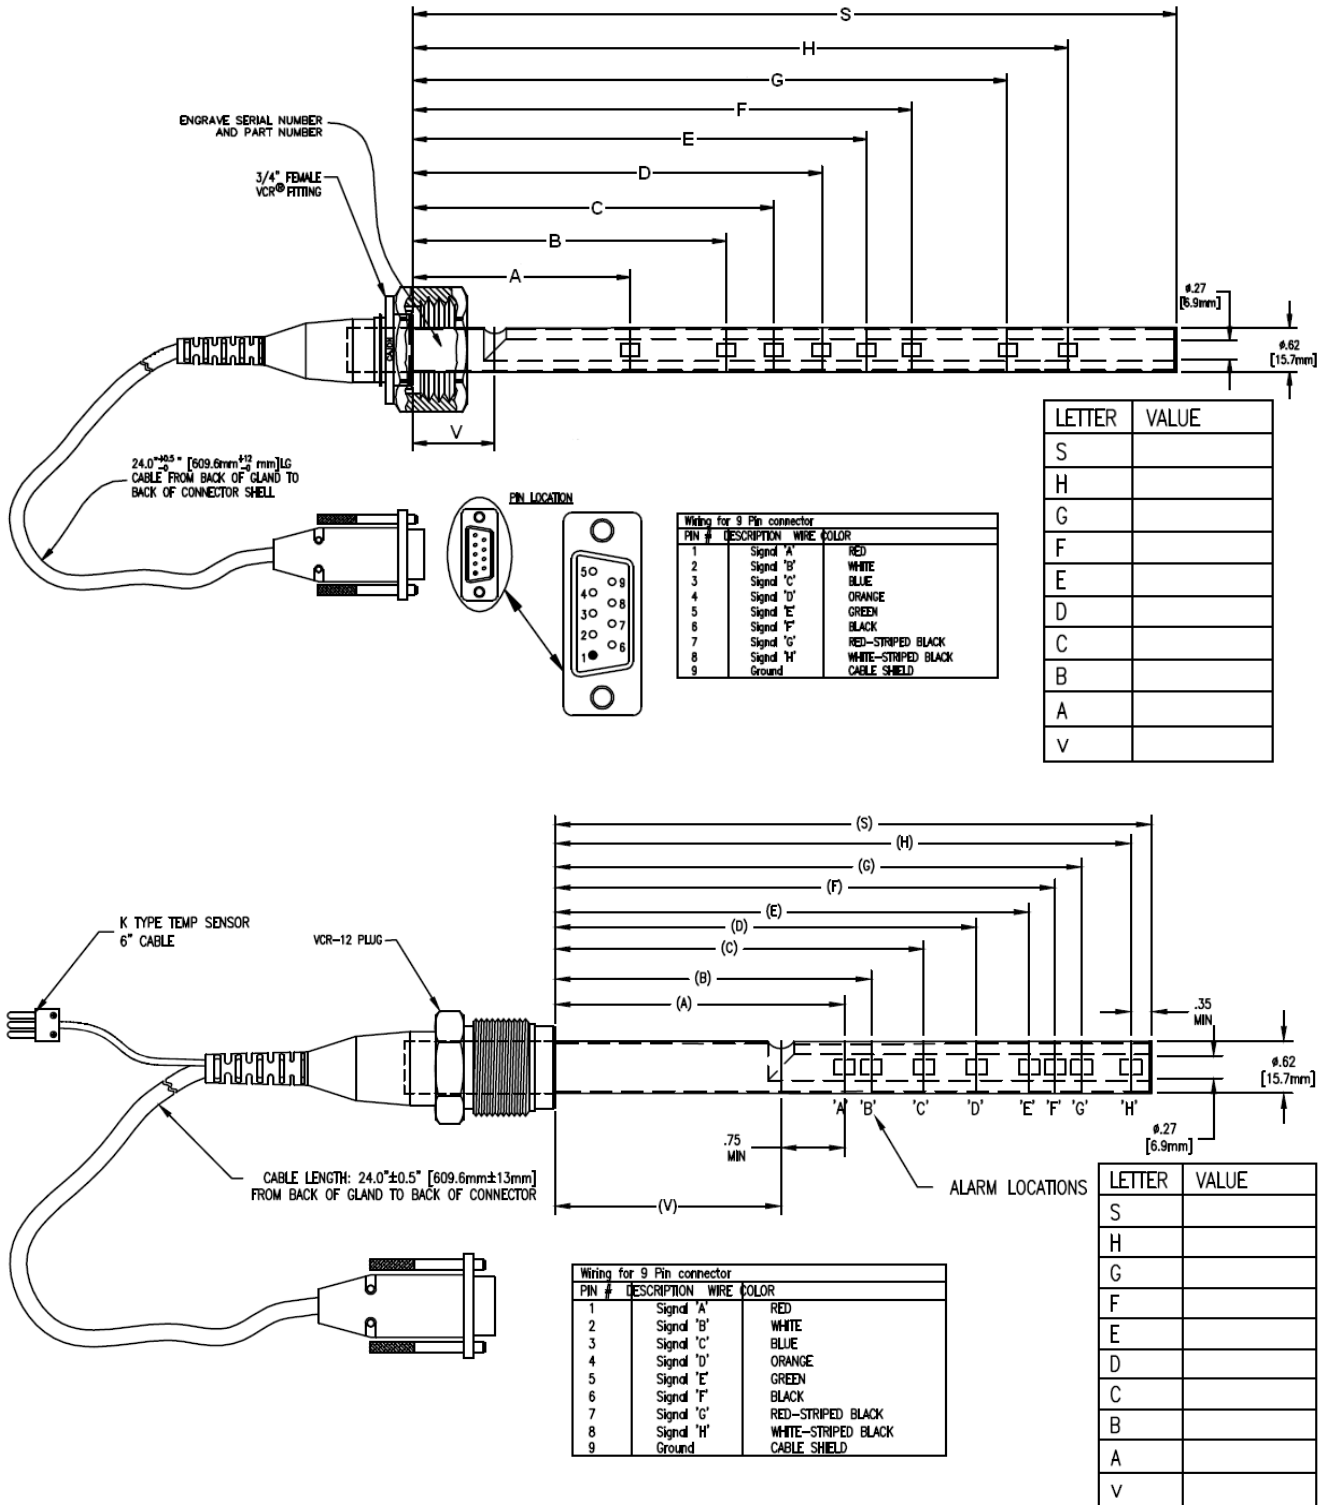


Figure 5: SL-900 series with 5/8" OD tube. The top drawing shows the sensor with a 3/4" female VCR® fitting while the bottom drawing shows it with a 3/4" male VCR® fitting.

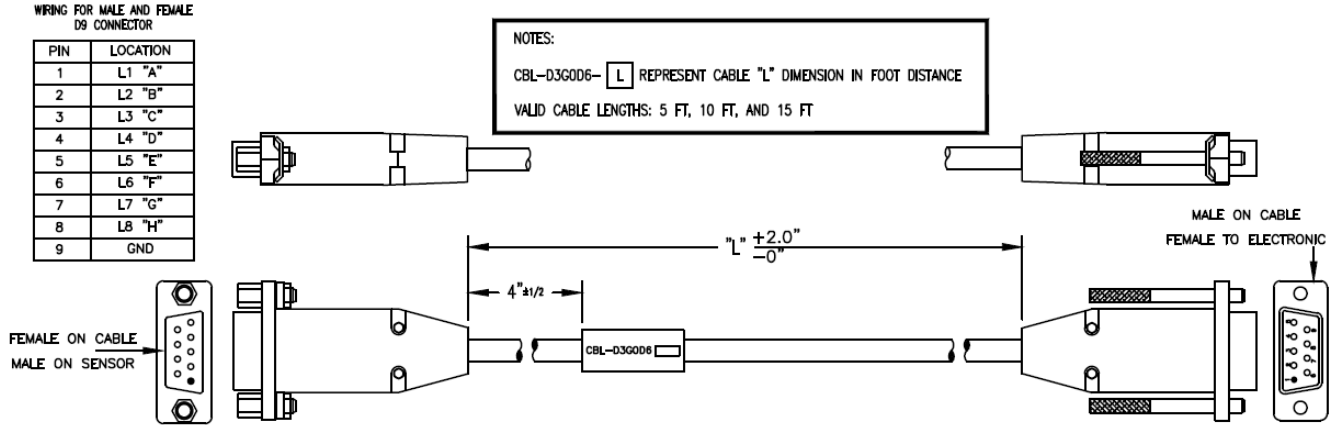


Figure 6: 8 Point extension cable

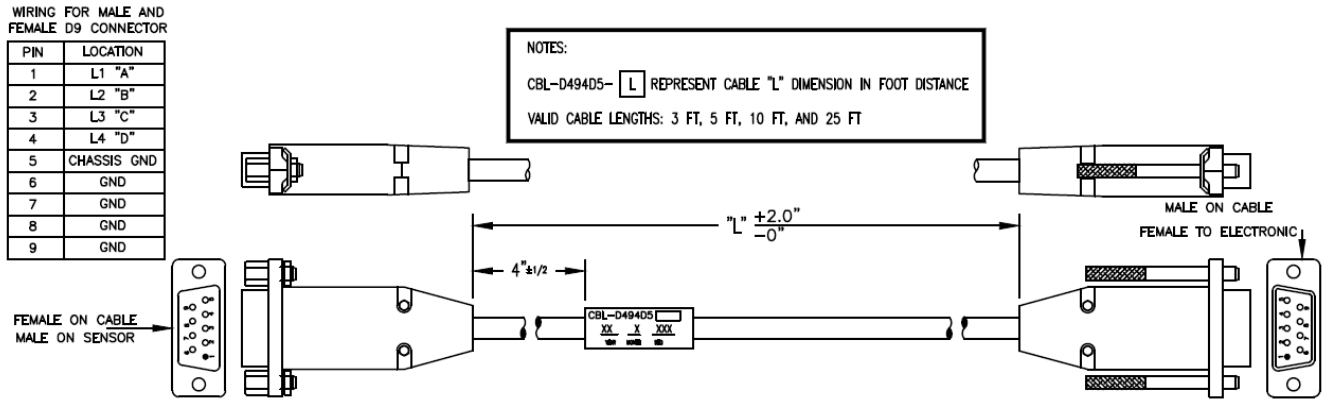


Figure 7: 2 or 4 Point extension cable

**OPERATION**

The sensor is mounted on the top of the vessel through VCR® metal gasket face seal fitting for single/multiple discrete point level, which is mounted in the liquid medium. The electronics generate a continuous wave ultrasonic signal that completely illuminates the liquid sensing area. The absence of liquid in the sensing area causes the ultrasonic signal to dissipate, which the electronics sense as a “dry” condition. When liquid is present, the amplitude of the ultrasonic signal increases which the electronics sense as a “wet” condition

**ORDERING INFORMATION**

**A. SL-900 Electronics:**

Points	Input Voltage	Outputs	Part Number
2	90-230 VAC	A Single, Tri-Color LED & ½ A, N.O. Contact	14124
2-4	90-230 VAC	Four, Dual-Color LEDs & 4, ½ A, N.O. Contacts	14101
2-4	24 VDC	Four, Dual-Color LEDs & 4, ½ A, N.O. Contacts	14102
2-4	90-230 VAC	Four, Dual-Color LEDs & 4, ½ A, N.C. Contacts (Cable Fault)	14111
2-4	24 VDC	Four, Dual-Color LEDs & 4, ½ A, N.C. Contacts (Cable Fault)	14112
5-8	24 VDC	Eight, Dual-Color LEDs & 8, ½ A, N.O. Contacts	14002

All electronics are programmed with the latest revision of software for that model. All electronics are laser engraved on back with part number and serial number.

**B. SL-900 Extension Cables:**

Length	Number of Points	Part Number
3 feet	2-4	CBL-D494D5-03
5 feet	2-4	CBL-D494D5-05
10 feet	2-4	CBL-D494D5-10
20 feet	2-4	CBL-D494D5-20
25 feet	2-4	CBL-D494D5-25
5 feet	5-8	CBL-D3G0D6-05
10 feet	5-8	CBL-D3G0D6-10
15 feet	5-8	CBL-D3G0D6-15
20 feet	5-8	CBL-D3G0D6-20

All cables have thumbscrews on male connector (for electronics) and standoffs on female connector (for sensor). All cables will be labeled with part number and not serialized.

**C. SL-900 Sensor Options:**

# Of Points	Connection	Outer Tube
2-4	1/2" male VCR® (plug)	1/2" OD
2-4	1/2" female VCR® (nut)	1/2" OD
2-4	3/4" male VCR® (plug)	1/2" OD
2-4	3/4" female VCR® (nut)	1/2" OD
2-8	3/4" male VCR® (plug)	5/8" OD
2-8	3/4" female VCR® (nut)	5/8" OD

**Additional Sensor Options:**

Standard sensor insertion length is 6-12 inches. Lengths of 12-24 inches are available at an additional charge. Please specify length in inches when placing an order.

Optional K-type thermocouple available for an additional charge (only with 1/2" or 5/8" OD tubes).

All sensors wired to standard 9-pin connector with standard hardware. Sensor cables are available in lengths of 6", 12", 18", and 24".

**NORTH AMERICA**

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Phone +1-800-522-6752  
Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

**EUROPE**

MEAS Deutschland GmbH(Europe)  
a TE Connectivity Company  
Phone: +49-800-440-5100  
Email: [customercare.tlse@te.com](mailto:customercare.tlse@te.com)

**ASIA**

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Phone: +86-400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.